



# Chokes

## Inductor Filters Coils Wide Band Chokes - WB Series / 宽频抗流线圈


### ► Features

The wide band choke cores mainly used in the PC boards to filters the EMI from the outsides.  
Ferrite core construction of low cost.

### ► Applications

Personal Computer and electronic products.

### ► Wide Band Choke Configurations & Dimensions (unit: mm)

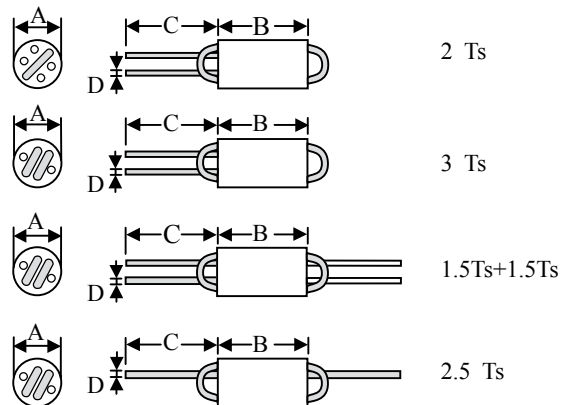

Type	$\Phi A \pm 0.5$	$B \pm 0.5$	$C \pm 3.0$	$\Phi D \pm 0.05$
TCWBR6H - 1.5Ts	6.0	10.0	25.0	0.5 / 0.6
TCWBR6H - 2.5Ts	6.0	10.0	25.0	0.5 / 0.6
TCWBR6H - 3.0Ts	6.0	10.0	25.0	0.5 / 0.6
TCWBR6H - 1.5+1.5Ts	6.0	10.0	25.0	0.5 / 0.6

Note: Design as Customer's Requested Specifications.

### ► How to Order



① Wide Band Chokes : TCWB

② Hole

Code	Hole
R6H	6 holes
R8H	8 holes

③ No. of Turns