



Power Resistors


High Voltage Power Resistors - BOX Series / 组合式功率电阻箱

BOX Series

An assembly-type enclosure contains DR series of and/or DQ series. The box offers excellent protection and safety, in that it not only provides high power load capability and durability, excellent heat dissipation, and a low temperature coefficient that is directly proportional, but also accommodates a flexible range of assembly options for convenient utilization and installation (Refer to the DR series and DQ series features for exact specifications). Suitable for educational modeling applications, load testing, industrial machinery, electric power distribution, instruments and automation control installations, etc. For custom specifications, please contact us to discuss the details.




► Power Resistor BDR Type 200W - 3200W Assembly-type Resistance Box

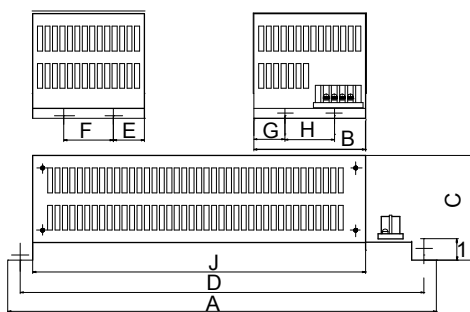

Power Rating	Dimensions(mm)											Resistance Range(Ω)
	CASE	A	B	C	D	E	F	G	H	I	J	
200W	A	345	90	76	325	45		43		8	268	0.1~100K Ω
400W	A	345	90	76	325	45		43		8	268	0.1~200K Ω
400W	B	450	152	100	428	30	90	74		10	355	0.1~200K Ω
800W	B	450	152	100	428	30	90	74		10	355	0.1~400K Ω
1200W	C	450	300	100	428	74	146	74	146	10	355	0.1~600K Ω
1600W	C	450	300	100	428	74	146	74	146	10	355	0.1~800K Ω
2000W	D	560	250	195	535	27	190	122		10	420	0.1~1000K Ω
2400W	D	560	250	195	535	27	190	122		10	420	0.1~1200K Ω
2800W	D	560	250	195	535	27	190	122		10	420	0.1~1400K Ω
3200W	D	560	250	195	535	27	190	122		10	420	0.1~1600K Ω

► Power Resistor BQR Type 300W - 4800W Assembly-type Resistance Box

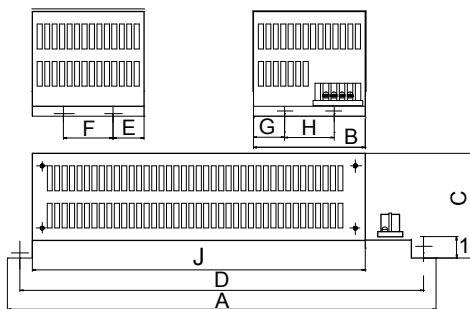

Power Rating	Dimensions(mm)											Resistance Range(Ω)
	CASE	A	B	C	D	E	F	G	H	I	J	
300W	A	345	90	76	325	45		43		8	268	0.1~30 Ω
600W	A	345	90	76	325	45		43		8	268	0.1~60 Ω
600W	B	450	152	100	428	30	90	74		10	355	0.1~60 Ω
1200W	B	450	152	100	428	30	90	74		10	355	0.1~120 Ω
1800W	C	450	300	100	428	74	146	74	146	10	355	0.1~180 Ω
2400W	C	450	300	100	428	74	146	74	146	10	355	0.1~240 Ω
3000W	D	560	250	195	535	27	190	122		10	420	0.1~300 Ω
3600W	D	560	250	195	535	27	190	122		10	420	0.1~360 Ω
4200W	D	560	250	195	535	27	190	122		10	420	0.1~420 Ω
4800W	D	560	250	195	535	27	190	122		10	420	0.1~480 Ω

Notice: All dimensions might be changed or modified, please refer to last updating specification.

► How to Order



- ① Product Type: BDR type, BQR type
- ② Rated Power: 200W~3200W, 300W~4800W
- ③ Resistance Value (Ω): (Ω) Indicates resistance value in units of ohms.

④ Resistance Tolerance

Code	Resistance Tolerance
J	$\pm 5\%$
K	$\pm 10\%$